


CANALKLER 250 assembly

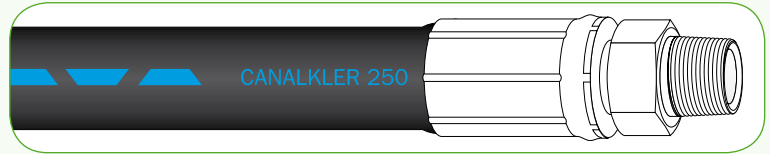

CONSTRUCTION & ENVIRONMENT

Drain and sewer cleaning

Applications

Sewer jetting and heavy duty, high pressure water cleaning.

Advantages

- Highly durable and safe performance.
- Extra thick abrasion resistant cover.
- Better flexibility, even at low temperatures.
- Deformation resistance.
- Extra high strength and security due to aramide reinforcement.
- Textile braided.
- Easy to handle and user friendly.

Technical description

Inner tube: SBR, black, smooth.

Reinforcement: aramide textile, braided.

Cover: SBR/NR, black, smooth.

Temperature range: - 30 °C to + 80 °C.

Standard/Approval: ZH 401/1 (Richtlinien für Flüssigkeitsstrahler) and proof pressured and certified according to DIN 50049.3.1B/ EN 10 204.3.1B.

Complementary information: delivered with test certificate on each factory assembled hose.

Couplings/Fittings

All hoses are assembled with BSP female/BSP male (repair couplings and press couplings on request).

All assembled hoses are pressure tested at 375 bar and have an unique hose number.

CANALKLER 250 assembly

08/06/2007

ID		Wall thickness	OD	Working pressure	Bursting pressure	Bending radius	Weight	Length	Article number	Stock (■) or min. order	
mm		mm	mm	bar	bar	mm	kg/m	m		m	
13.0	± 0,5	6.30	± 0,5	25.6	250	> 625	70	0.45	40	5014178	■
									60	5014179	■
									80	5014180	■
									100	5014916	■
									120	5014005	■
19.0	± 0,6	6.30	± 0,5	31.6	250	> 625	90	0.61	40	5014181	■
									80	5014182	■
									100	5014459	■
									120	5014006	■
25.0	± 0,8	7.15	± 0,5	39.3	250	> 625	100	0.90	40	5014183	■
									80	5014184	■
									100	5014238	■
									120	5014007	■
									150	5014461	■
									160	5014185	■
32.0	± 1.0	7.80	± 0,6	47.6	250	> 625	130	1.12	40	5014187	■
									80	5014188	■
									120	5014008	■
									150	5014466	■
									160	5014189	■
38.0	± 1.0	8.00	± 0,8	54.0	250	> 625	155	1.35	120	5014190	■
										5014009	■

Embossed branding

